



Tel: 714-891-7797  
 Fax: 714-891-2478  
 Toll Free: 800-822-8855  
 www.calfaucets.com

California Faucets®

**SINGLE HOLE-SINGLE HANDLE BIDET FAUCET**

**6204**

**INSTALLATION  
 INSTRUCTIONS**

**IMPORTANT**

All *California Faucets*® products are engineered to provide quality performance provided they are installed and operated properly. To fully enjoy the comfort, safety, and reliability of your new Single Hole-Single Handle Bidet Faucet, please follow the instructions below.

California Faucets reserves the right to make modification and specification changes at any time. Please visit [www.calfaucets.com](http://www.calfaucets.com) for most current technical data.

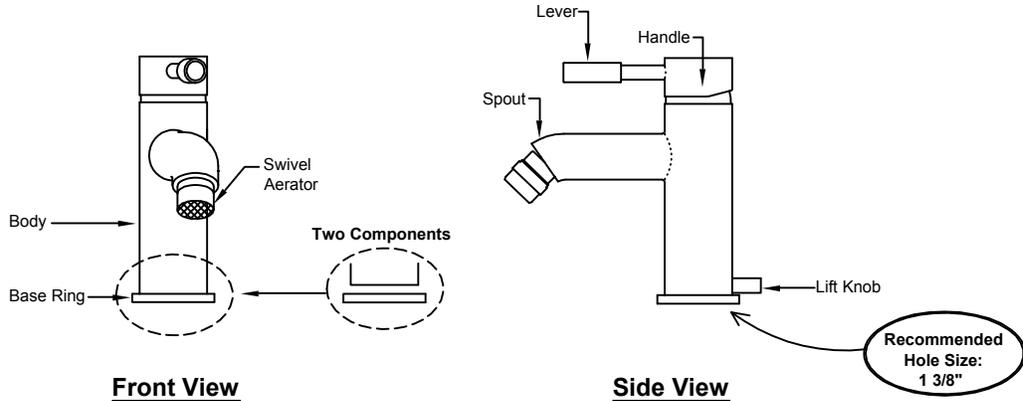


Fig. 1

Meets A112.18.1 (Min. 2.4 gpm)

**\*\*\*NOTE: SHUT OFF WATER SUPPLY BEFORE BEGINNING INSTALLATION\*\*\***

- 1** **Install flex lines:**  
 -Screw flex lines into body, (one long & one short) tighten with adjustable wrench until stop. Do not over tighten.

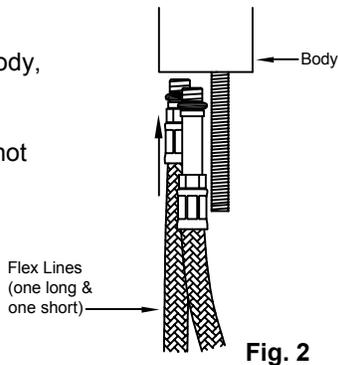


Fig. 2

- 2** **Position base ring/sealing washer:**  
 -Make sure sealing washer is fitted into body base ring.  
 -Place bidet faucet base ring over hole in bidet/top, with sealing washer face down and center.

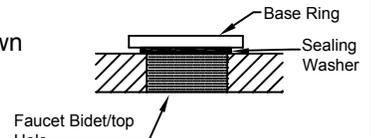


Fig. 3

- 3** **Insert lift knob/lift rod:**  
 -Insert lift knob/lift rod into slot at back of bidet faucet body.

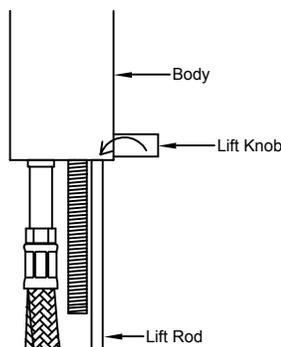


Fig. 4

- 4** **Install assembly:**  
 -Place bidet faucet body assembly on faucet base ring, inserting flex lines, mounting rods and lift rod through hole in bidet top.  
 -Center bidet faucet on hole.

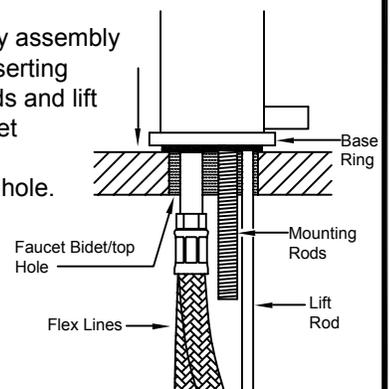
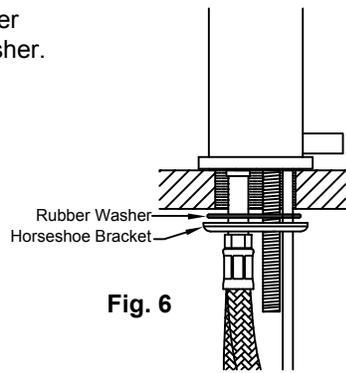



Fig. 5

**5****Install washers:**


- Install rubber washer and horseshoe washer.

**Fig. 6****6****Tighten to surface:**

- Screw on 2 brass nuts to mounting rods.
- Hand tighten as you align Bidet faucet.
- Firmly tighten nuts with a deep socket or adjustable wrench.

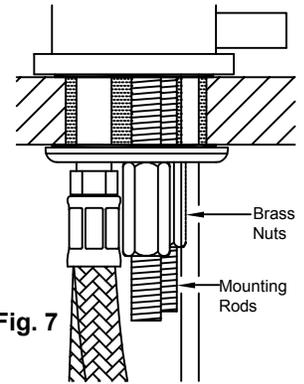
**Fig. 7****7****Install pop-up assembly.**

- Separate drain collar from pop-up assembly.
- Apply silicon caulking to underside of drain collar. **NOTE: Do not use "Plumbers Putty" or any oil based sealants! Use of anything other than silicon caulking will VOID the finish warranty.**
- Insert drain body from underside through sink. Slowly screw on drain collar, align with ball rod hole facing back wall, then gently pull down into sink and firmly tighten brass nut from below.
- Remove tailpiece from drain body and apply teflon tape, approx. 3 to 5 wraps around threads and reinstall into bottom of drain body.
- Insert stopper in collar and hold with eye-screw hole facing back. If necessary, adjust stopper eye-screw height by loosening lock nut and rotating counter-clockwise. Tighten lock nut (**See Fig. 9**).
- Remove spring clip from ball rod.
- Remove nut and cone washers and slide onto end of ball rod.
- Insert ball rod into drain body below so short end of ball rod end fits in stopper eye-screw hole. Snug ball rod nut (do not over tighten). Ball rod must move up & down freely (**See Fig. 9**).
- Insert lift rod through top of spout and then through hole rod strap underneath sink. Tighten thumb-screw of hole rod strap against lift rod and connect to ball rod by gently pinching locking spring clip and sliding one side of spring clip onto ball rod.
- Insert hole strap onto ball rod, then pinch spring clip together to fit on ball rod.

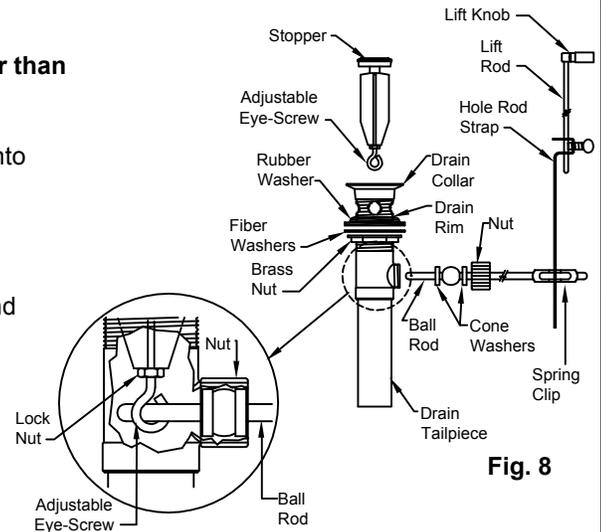
**Fig. 8****Fig. 9****8****Connect flex lines to water supply:**

- Connect flex lines to your angle stops.

**IMPORTANT:** Remove aerator, open hot/cold water supplies to flush faucet bidet and replace aerator prior to using faucet bidet. Debris remaining in the line will damage lavatory bodies and cause leaking. Failure to flush the lines could result in voiding the warranty.

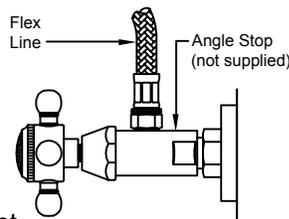**Fig. 8****9****Install "P" trap:**

- Connect your waste "P" trap to the drain tail piece.

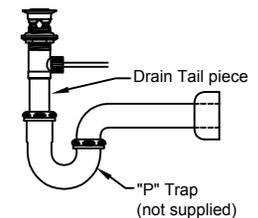**Fig. 9**

**NOTE:**  
P-trap and angle stops are not supplied. We recommend genuine Cal-Trim parts available at your authorized California Faucets dealer.

**NOTE: Due to sediment in the water it may be necessary on occasion to remove the aerator and clean the screen with a soft bristle toothbrush.**

**IMPORTANT CLEANING NOTICE**  
Please refer to *Finish Care Instructions* for complete cleaning information. Wipe frequently with a soft, damp cloth. **Never use acids, harsh abrasives or detergents.**