

IMPORTANT

All *California Faucets* products are engineered to provide quality performance provided they are installed and operated properly. To fully enjoy the comfort, safety, and reliability of your new Widespread Faucet, please follow the instructions below.

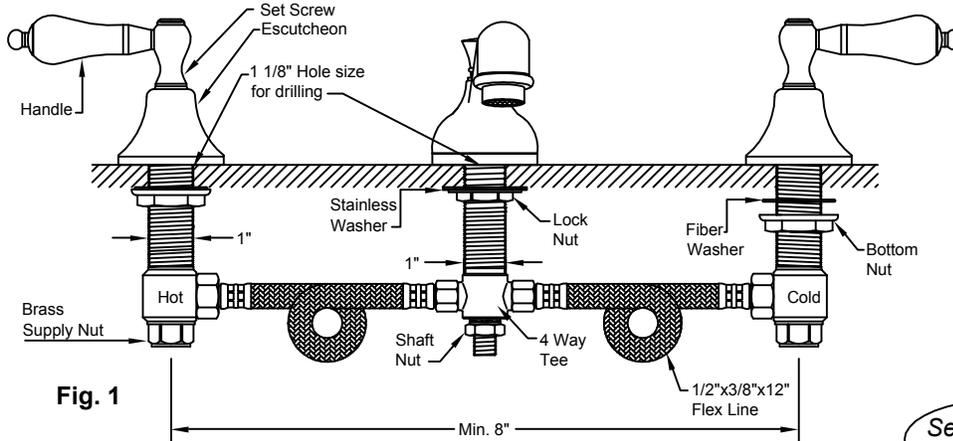


Fig. 1

All Widespread faucets meet A112.18.1 - 2.2gpm/8.31 L/min.

Series #2002 Shown

#2002-PL



Porcelain Handle

#2002-CR



Cross Handle

#2002-LEV



Lever Handle

#2002-SC



Scroll Handle

*****NOTE: SHUT OFF WATER SUPPLY BEFORE BEGINNING INSTALLATION*****

1

Install spout according to the type of tee it has:

Model #2002 uses 4-way tee:

- Remove the tee, locknut and stainless steel washer.
- Insert the spout through center hole of the sink or countertop.
- Place washer and lock nut onto shank from below. Align spout and tighten nut until spout is firmly in place.
- Insert white washer into top of tee and slide assembly onto spout shank.
- Place the rubber washer, brass washer and shaft nut onto shaft and tighten.

OR

Models #2102 & 2202 use 3-way tee:

- Remove the tee, lock nut and notched washer.
- Insert the spout through center hole of the sink or countertop.
- Slip the notched washer over spout shank. Align notch for pop-up rod to pass through, then thread lock nut onto the spout shank. Align spout and tighten nut firmly.
- Place white washer into top of tee and screw assembly onto spout shank.
- Insert lift rod through top of spout

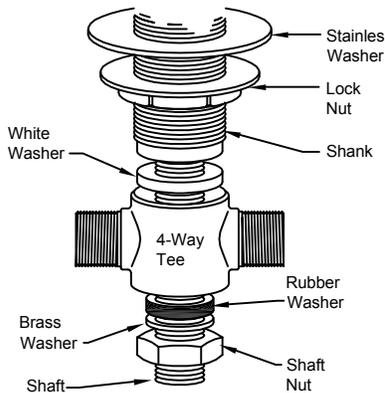


Fig. 2

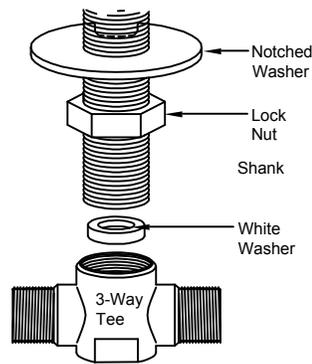


Fig. 3

#2102-PL



Porcelain Handle

#2102-CR



Cross Handle

#2102-LEV



Lever Handle

#2102-SC



Scroll Handle

#2202-CR



Cross Handle

#2202-ML



Metal Lever Handle

#2202-CY



Metal Cylinder Handle

NOTE: Due to sediment in the water it may be necessary on occasion to remove the aerator and clean the screen with a soft bristle toothbrush.

IMPORTANT CLEANING NOTICE
Please refer to *Finish Care Instructions* for complete cleaning information. Wipe frequently with a soft, damp cloth. **Never use acids, harsh abrasives or detergents.**

2A Install valve bodies: For series 20 & 21

NOTE: Hot & cold valves are labeled: cold=blue & hot=red.

- Loosen handle set screws with Allen key provided. Remove handle, escutcheon and top nut.
- Turn bottom nut with fiber washer down the valve until stops, (repeat for other valve).
- Insert valve through hole from below and install top nut, and adjust to proper height. (See Fig. 4A), (repeat for other valve).
- Tighten the bottom nuts to secure the valves onto sink or countertop.
- Install trim parts escutcheons and handles and tighten handle set screws with allen key provided.

Reminder: Please retain Allen key as handles may require re-tightening with normal use.

- Attach flex lines between valves and spout tee. Hand tighten, then 1/4 to 1/2 turn more with wrench (not supplied). Do not overtighten. (See Fig 1.)

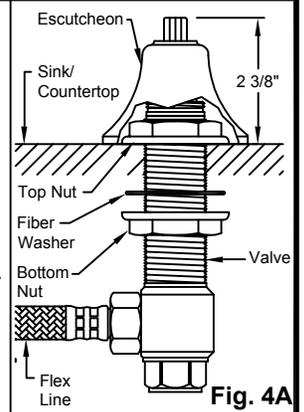


Fig. 4A

2B Install valve bodies: For series 22

NOTE: Hot & cold valves are labeled: cold=blue & hot=red.

- Loosen handle set screws with Allen key provided. Remove handle, escutcheon, and spacer cup. Turn bottom nut with fiber washer down the valve until stops and place spacer cup with flange up back onto the valve body, (repeat for other valve).
- Insert valve through hole from below and install the escutcheon and adjust to proper height, (See Fig. 4B). Then place handle onto valve broach to verify correct clearance between handle and escutcheon, (repeat for other valve).
- Align handle in desired position and tighten the bottom nut to secure the valve, (repeat for other valve).
- Install handles and tighten handle set screws with Allen key provided.

Reminder: Please retain Allen key as handles may require re-tightening with normal use.

- Attach flex lines between valves and spout tee. Hand tighten, then 1/4 to 1/2 turn more with wrench (not supplied). Do not overtighten. (See Fig 1.)

Installation Note for series: #22

The trims to these products do not require a top nut to be installed on the valve, the escutcheon takes the place of the top nut, (See Fig. 4B)

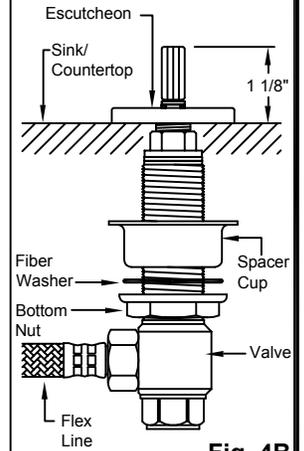


Fig. 4B

3 Install pop-up assembly.

- Separate drain collar from pop-up assembly.
- Apply silicon caulking to underside of drain collar. **NOTE: Do not use "Plumbers Putty" or any oil based sealants! Use of anything other than silicon caulking will VOID the finish warranty.**
- Insert drain body from underside through sink. Slowly screw on drain collar, align with ball rod hole facing back wall, then gently pull down into sink and firmly tighten brass nut from below.
- Remove tailpiece from drain body and apply teflon tape, approx. 3 to 5 wraps around threads and reinstall into bottom of drain body.
- Insert stopper in collar and hold with eye-hole facing back (See Fig. 5).
- Remove spring clip from ball rod.
- Remove nut and cone washers and slide onto end of ball rod.
- Insert ball rod into drain body below so short end of ball rod end fits in stopper eye-hole. Snug ball rod nut (do not over tighten). Ball rod must move up & down freely (See Fig. 5).
- Insert lift rod through top of spout and then through hole rod strap underneath sink. Tighten thumb-screw of hole rod strap against lift rod and connect to ball rod by gently pinching locking spring clip and sliding one side of spring clip onto ball rod.
- Insert hole strap onto ball rod, then pinch spring clip together to fit on ball rod.

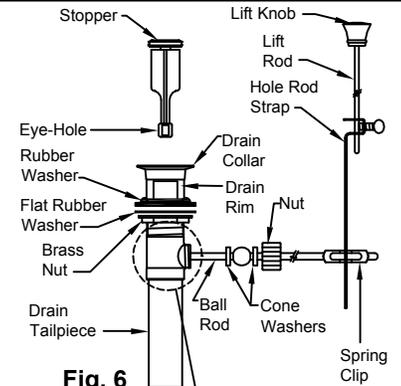


Fig. 6

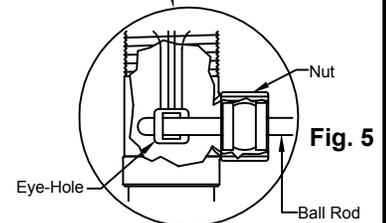


Fig. 5

4 Connect faucet to water supply:

IMPORTANT: Flush supply lines of all debris prior to connecting to lavatory valve bodies. Debris remaining in the line will damage valve bodies and cause leaking. Failure to flush the lines could result in voiding the warranty.

- Connect supply risers from the angle stops.

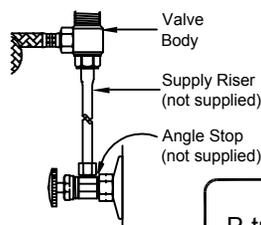


Fig. 7

5 Install "P" trap:

- Connect your waste "P" trap to the drain tailpiece.

NOTE:
P-trap, angle stops, and supply risers are not supplied.

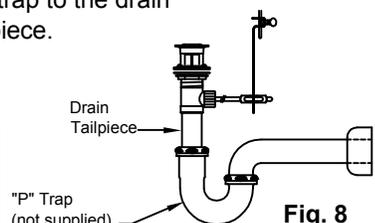


Fig. 8